



To Promote the Progress



of Science and Useful Arts

The Director

of the United States Patent and Trademark Office has received an application for a patent for a new and useful invention. The title and description of the invention are enclosed. The requirements of law have been complied with, and it has been determined that a patent on the invention shall be granted under the law.

Therefore, this United States

Patent

grants to the person(s) having title to this patent the right to exclude others from making, using, offering for sale, or selling the invention throughout the United States of America or importing the invention into the United States of America, and if the invention is a process, of the right to exclude others from using, offering for sale or selling throughout the United States of America, products made by that process, for the term set forth in 35 U.S.C. 154(a)(2) or (c)(1), subject to the payment of maintenance fees as provided by 35 U.S.C. 41(b). See the Maintenance Fee Notice on the inside of the cover.



Katherine Kelly Vidal



DIRECTOR OF THE UNITED STATES PATENT AND TRADEMARK OFFICE

Maintenance Fee Notice

If the application for this patent was filed on or after December 12, 1980, maintenance fees are due three years and six months, seven years and six months, and eleven years and six months after the date of this grant, or within a grace period of six months thereafter upon payment of a surcharge as provided by law. The amount, number and timing of the maintenance fees required may be changed by law or regulation. Unless payment of the applicable maintenance fee is received in the United States Patent and Trademark Office on or before the date the fee is due or within a grace period of six months thereafter, the patent will expire as of the end of such grace period.

Patent Term Notice

If the application for this patent was filed on or after June 8, 1995, the term of this patent begins on the date on which this patent issues and ends twenty years from the filing date of the application or, if the application contains a specific reference to an earlier filed application or applications under 35 U.S.C. 120, 121, 365(c), or 386(c), twenty years from the filing date of the earliest such application (“the twenty-year term”), subject to the payment of maintenance fees as provided by 35 U.S.C. 41(b), and any extension as provided by 35 U.S.C. 154(b) or 156 or any disclaimer under 35 U.S.C. 253.

If this application was filed prior to June 8, 1995, the term of this patent begins on the date on which this patent issues and ends on the later of seventeen years from the date of the grant of this patent or the twenty-year term set forth above for patents resulting from applications filed on or after June 8, 1995, subject to the payment of maintenance fees as provided by 35 U.S.C. 41(b) and any extension as provided by 35 U.S.C. 156 or any disclaimer under 35 U.S.C. 253.

(12) **United States Patent**
Bernardi

(10) **Patent No.:** **US 11,629,895 B2**
(45) **Date of Patent:** **Apr. 18, 2023**

(54) **CONDENSING HEAT EXCHANGER FOR AIR TO LIQUID HEAT PUMPS**

(71) Applicant: **United States ThermoAmp Inc.**,
Latrobe, PA (US)

(72) Inventor: **William P. Bernardi**, Ligonier Twp.,
PA (US)

(73) Assignee: **United States ThermoAmp Inc.**,
Latrobe, PA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 203 days.

(21) Appl. No.: **17/110,710**

(22) Filed: **Dec. 3, 2020**

(65) **Prior Publication Data**
US 2021/0172657 A1 Jun. 10, 2021

Related U.S. Application Data

(60) Provisional application No. 62/943,482, filed on Dec. 4, 2019.

(51) **Int. Cl.**
E04H 4/00 (2006.01)
F25B 39/00 (2006.01)
E04H 4/12 (2006.01)
F28F 1/42 (2006.01)
F28D 7/10 (2006.01)
F25B 39/04 (2006.01)

(52) **U.S. Cl.**
CPC **F25B 39/00** (2013.01); **E04H 4/129** (2013.01); **F28D 7/103** (2013.01); **F28F 1/426** (2013.01); **F25B 39/04** (2013.01)

(58) **Field of Classification Search**
CPC F28D 7/103; Y10S 285/924; F25B 39/04; F25B 2339/047; E04H 4/129
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,633,338 A * 3/1953 Hirsch F28D 7/026 165/145
9,255,656 B2 2/2016 Bernardi
(Continued)

FOREIGN PATENT DOCUMENTS

DE 102011008119 A1 * 7/2012 F16L 9/18
FR 2484619 A * 12/1981 C12G 1/0213

OTHER PUBLICATIONS

“Pentair Ultratemp® High-Performance Heat Pump”, Pentair, Accessible at <https://www.pentair.com/content/dam/extranet/pentair-pool/residential/brochures/pool-heaters/ultratemp-high-performance-heat-pump-brochure-english.pdf>, Last Accessed Dec. 30, 2020.


(Continued)

Primary Examiner — Eric S Ruppert
(74) *Attorney, Agent, or Firm* — The Webb Law Firm

(57) **ABSTRACT**

A heat exchange device may include a first pipe including a first inlet, a first outlet, and a first sidewall extending therebetween; a second pipe including a second inlet, a second outlet, and a second sidewall extending therebetween; and a plurality of dimples extending between the first sidewall and the second sidewall. The second sidewall may surround and extend about the first sidewall, the first sidewall may define a first fluid passage configured to permit flow of a first fluid, and the second sidewall and the first sidewall may define a second fluid passage configured to permit flow of a second fluid.

19 Claims, 12 Drawing Sheets

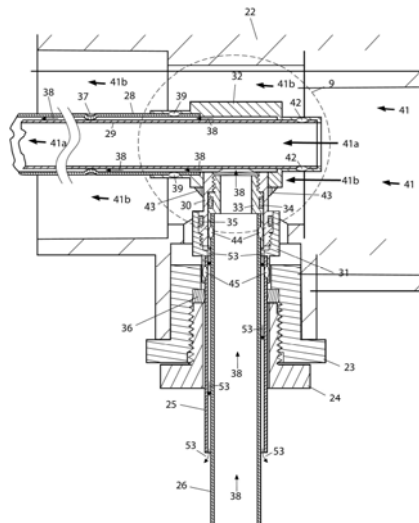

(56)

References Cited

U.S. PATENT DOCUMENTS

2010/0090456 A1 * 4/2010 Halaczkiwicz ... F16L 19/0212
285/12
2014/0318738 A1 * 10/2014 Bernardi F28D 7/024
165/67

OTHER PUBLICATIONS

“Installation and Operation Manual, Heat Pump Pool & Spa Heater, Models 2450, 3450,4450, 5450, 6450, 6450PD, 6450HC, 8450, & 8450HC”, Raypak, Inc., Accessible at <http://cdn.globalimageserver.com/FetchDocument.aspx?ID=a6a43ed9-ccb9-4449-b4af-af6111d27828>, Last Accessed Dec. 30, 2020.

* cited by examiner

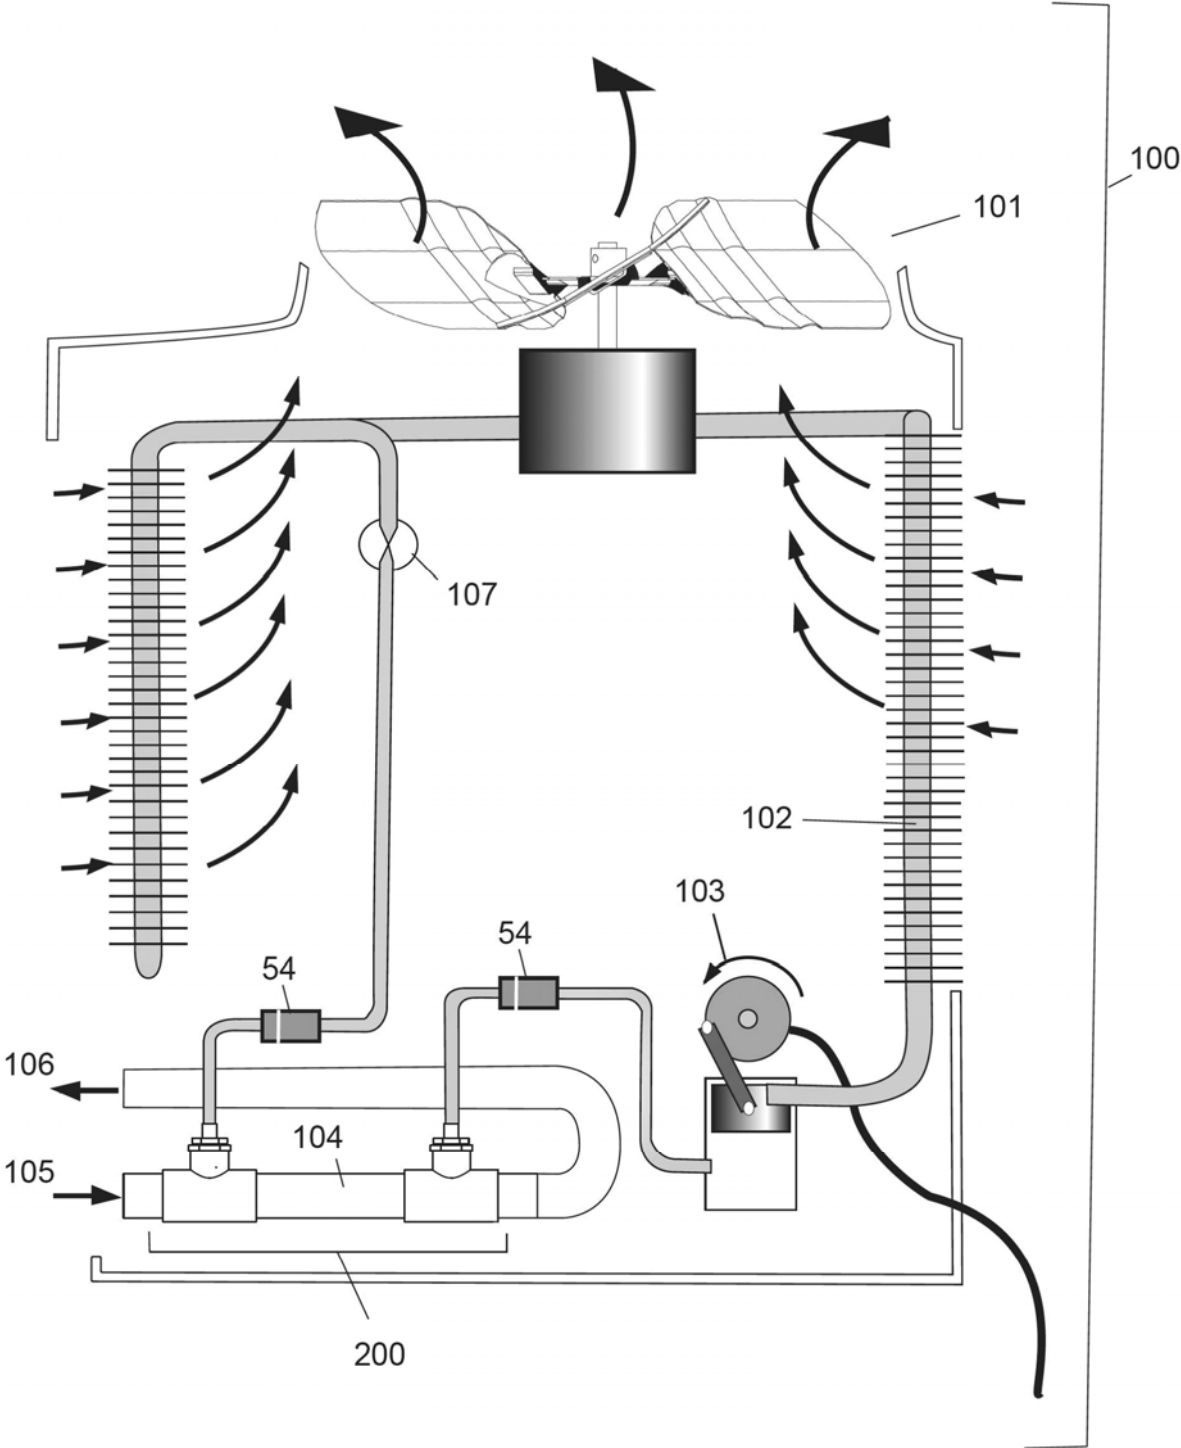


FIG. 1

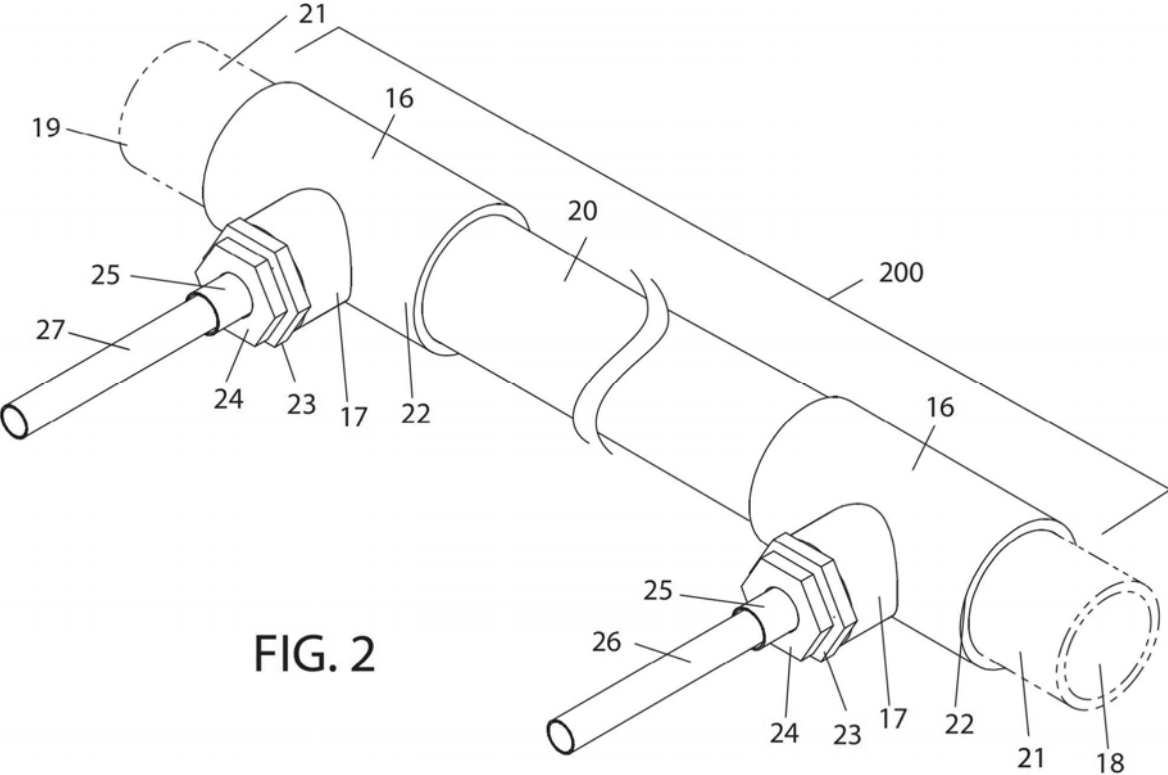


FIG. 2

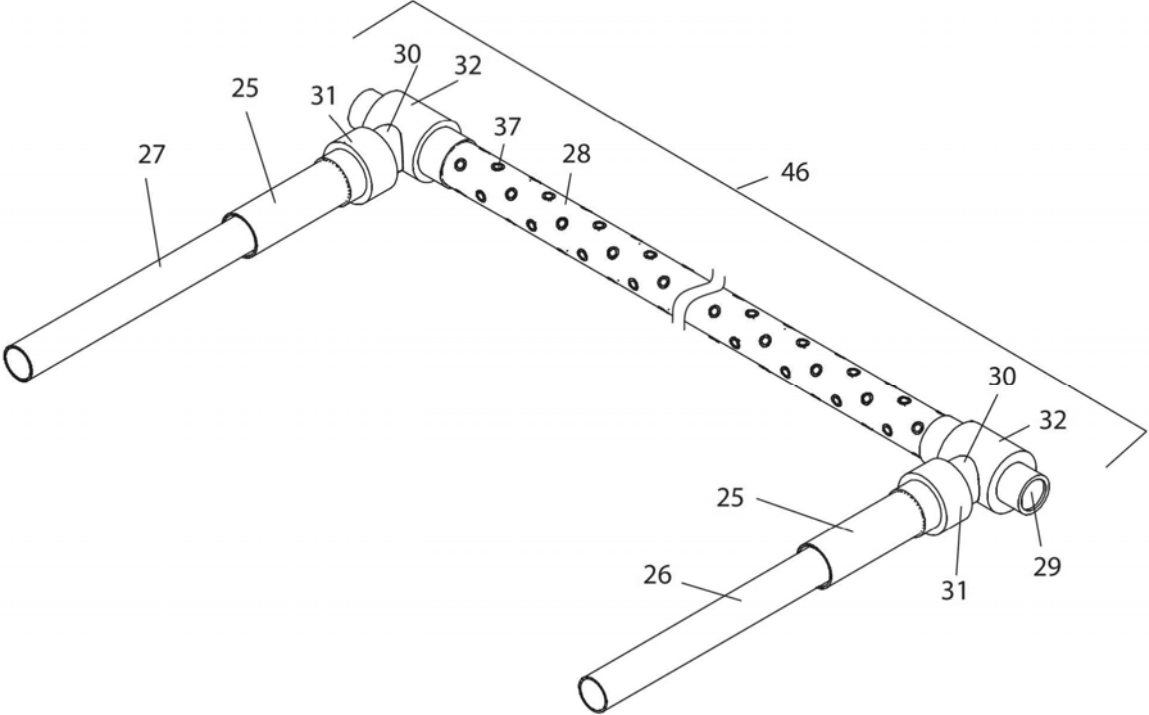


FIG. 3

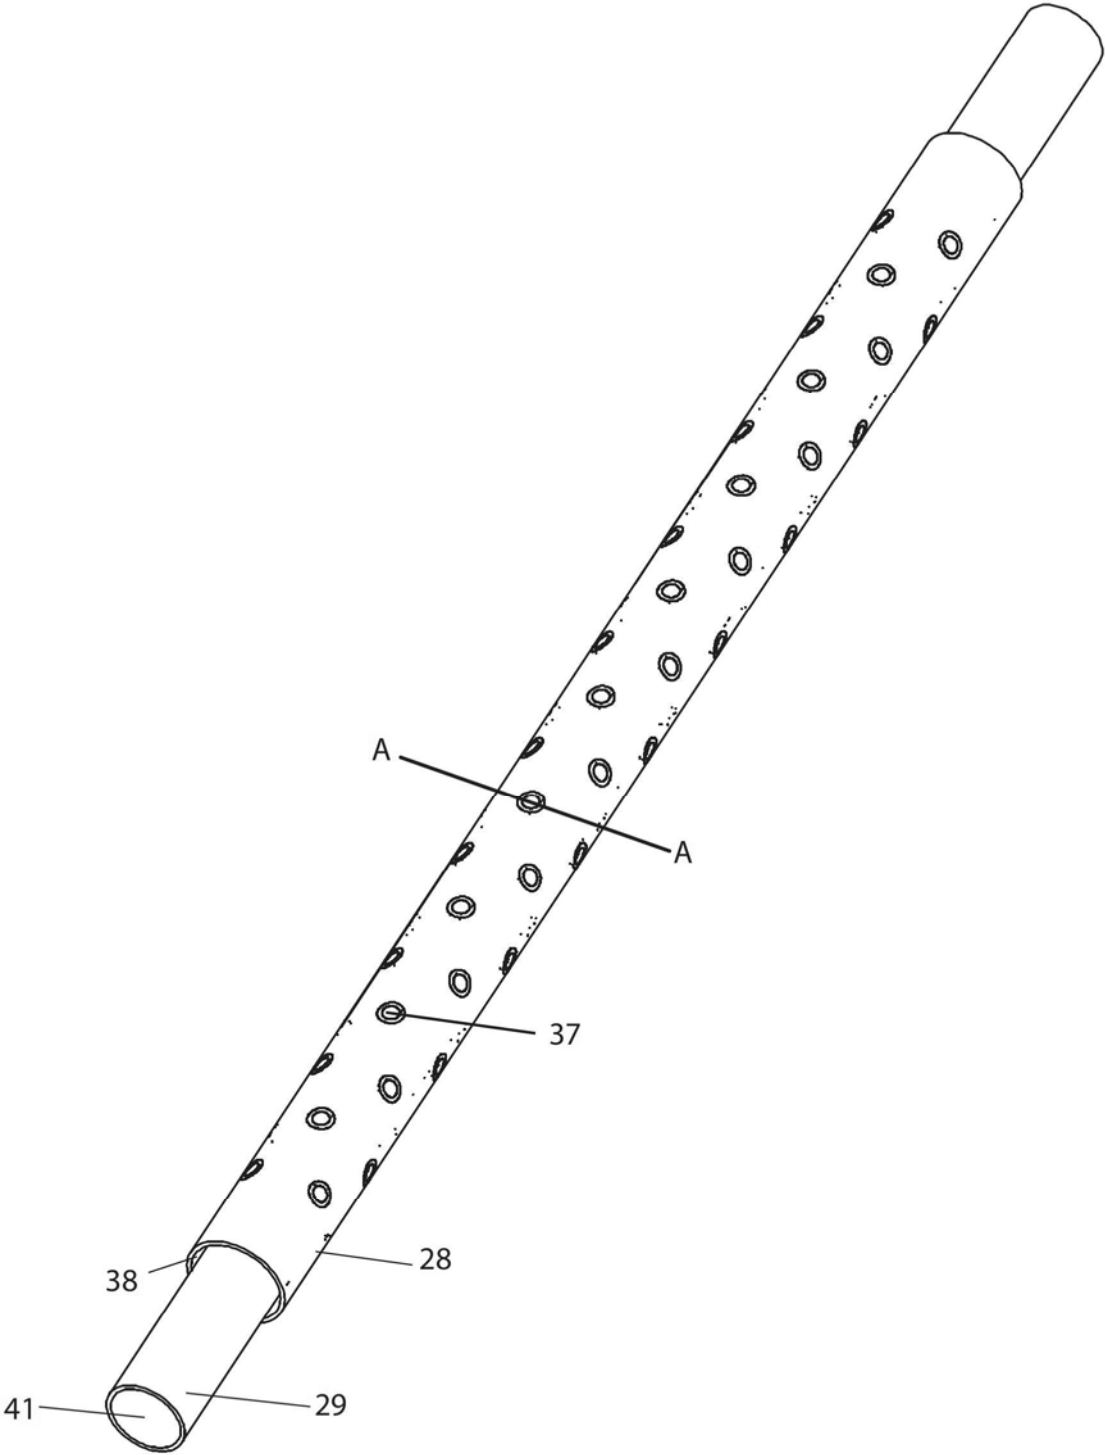


FIG. 4

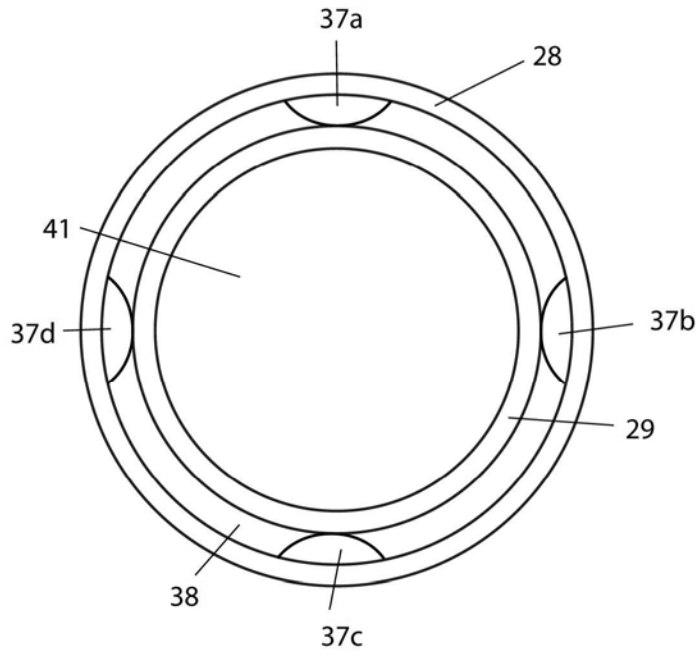


FIG. 5

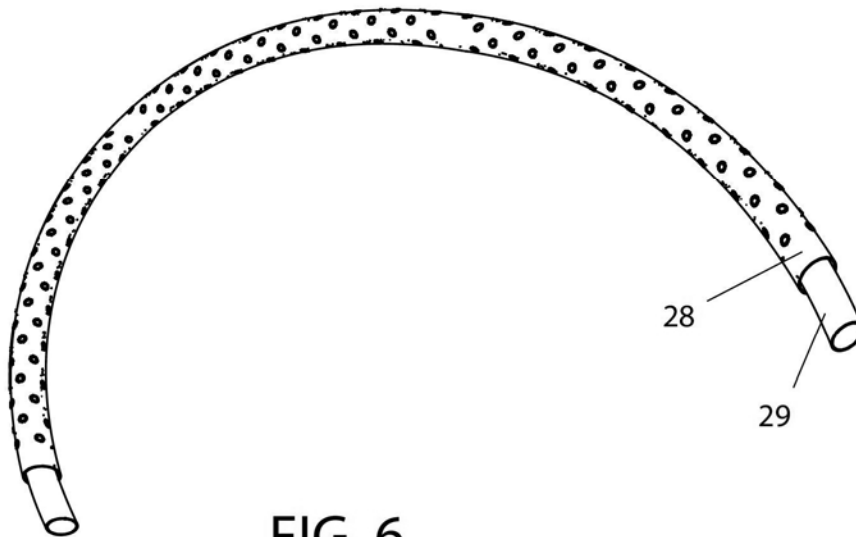


FIG. 6

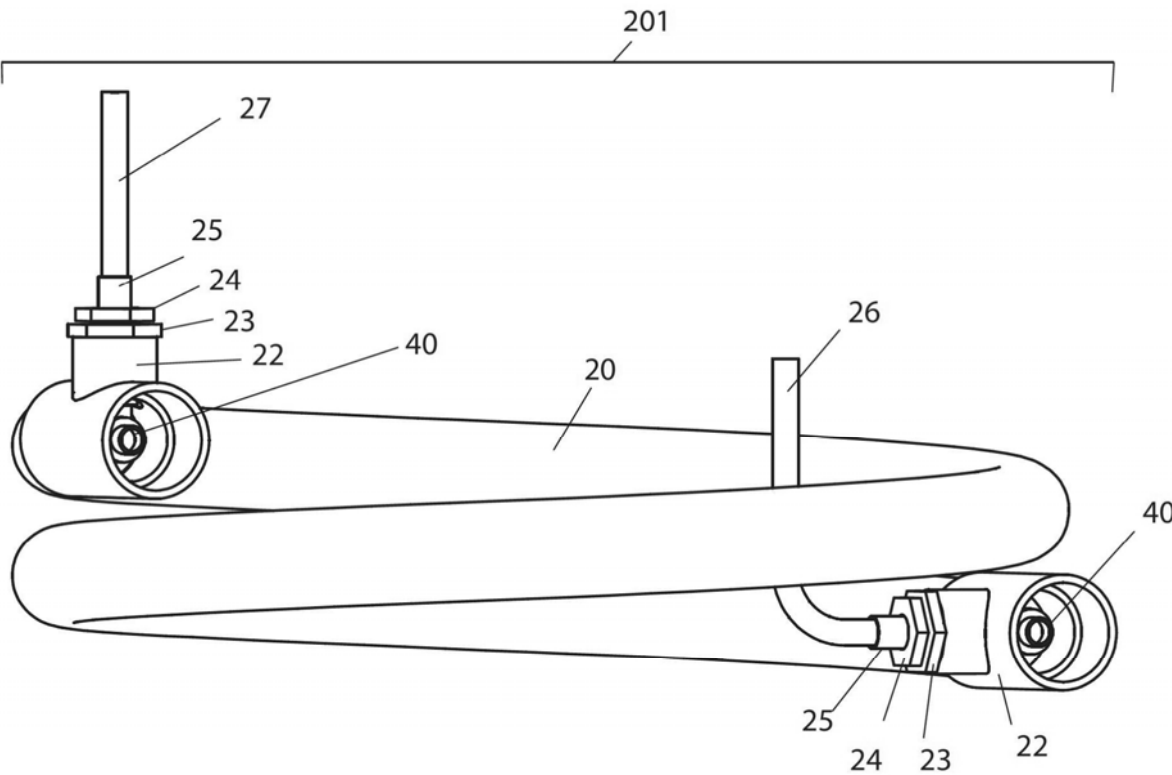


FIG. 7

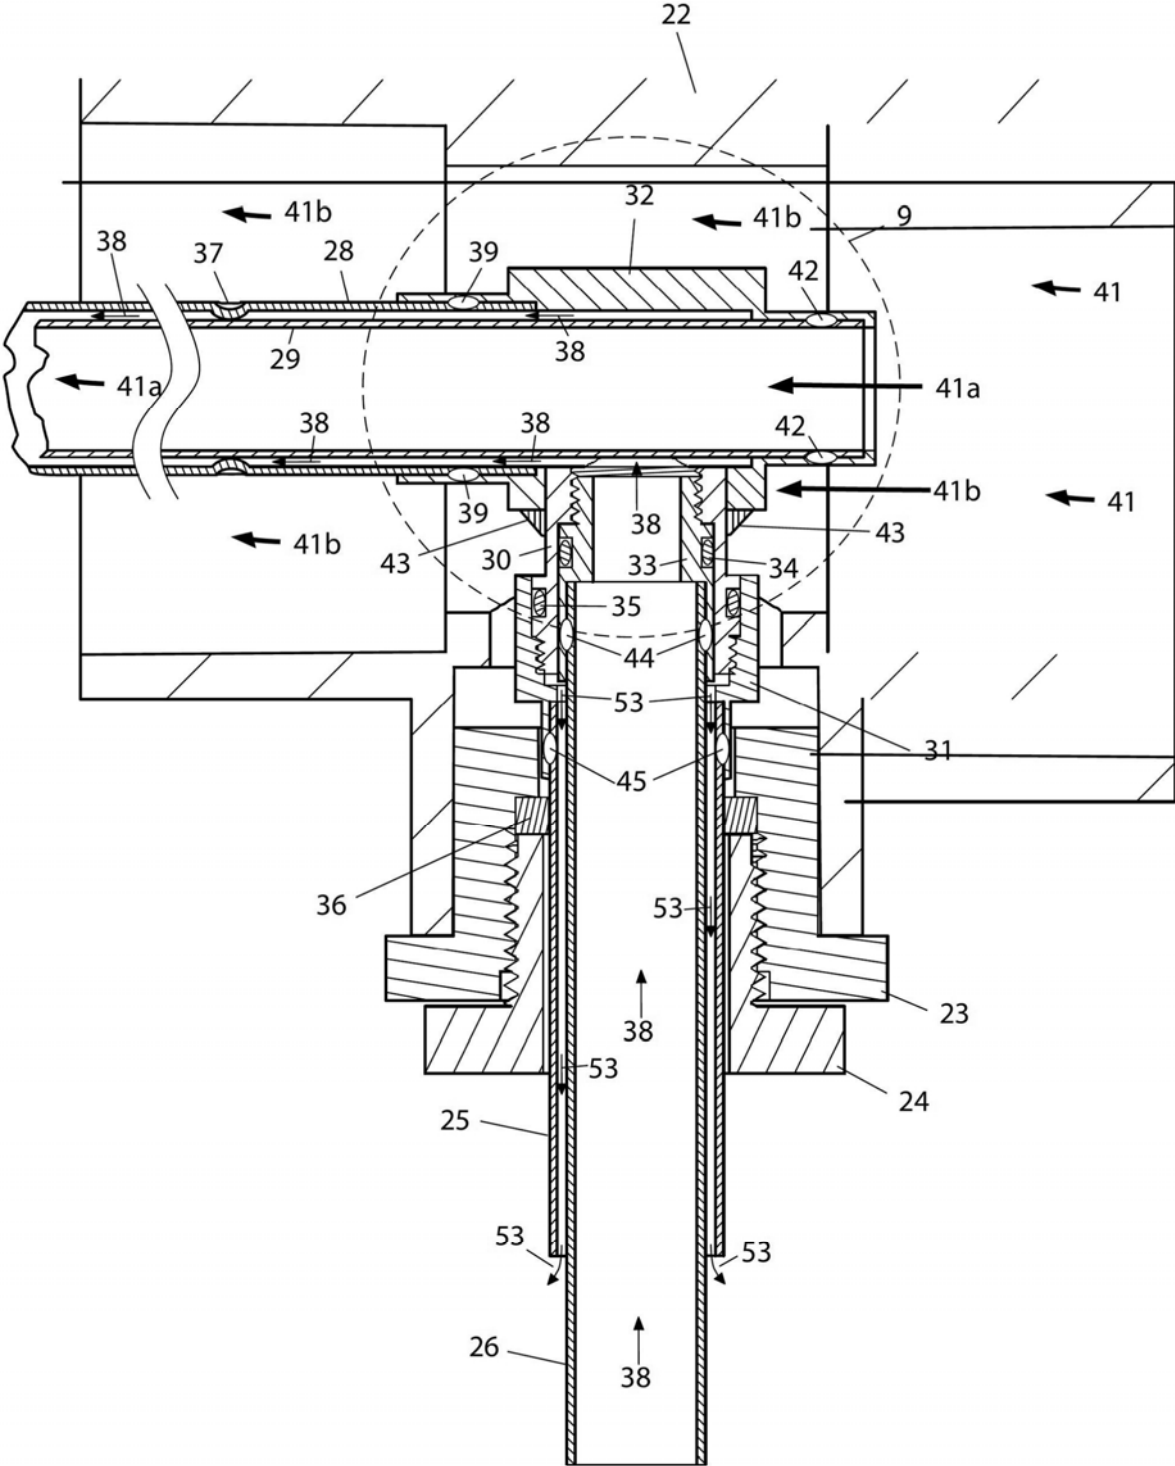


FIG. 8

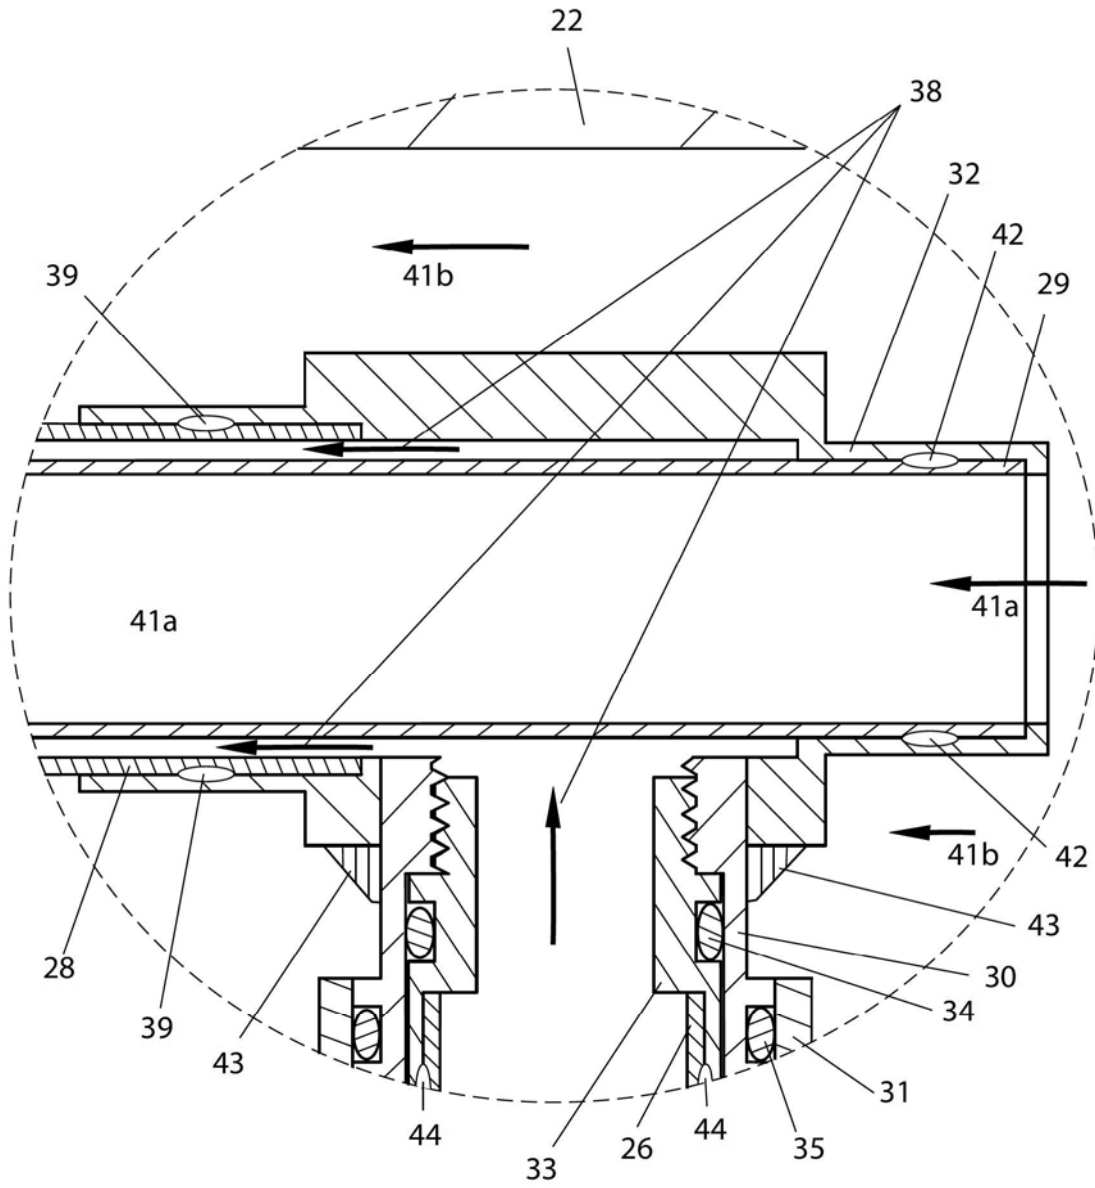


FIG. 9

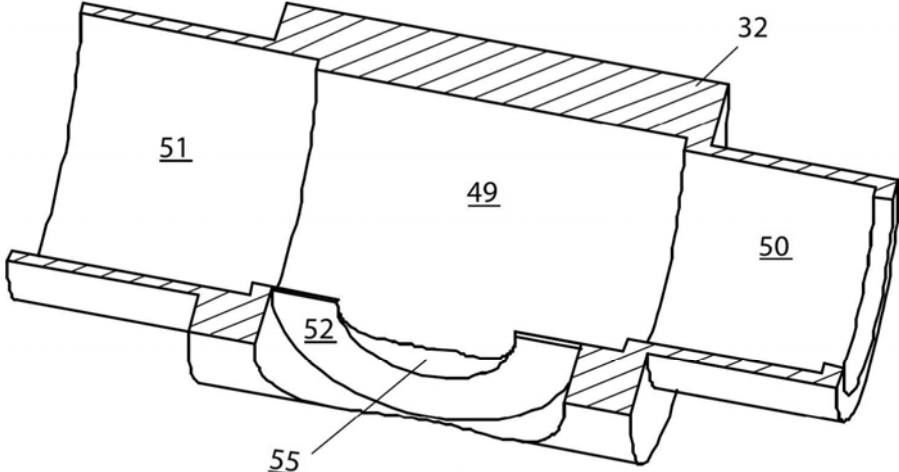


FIG. 10

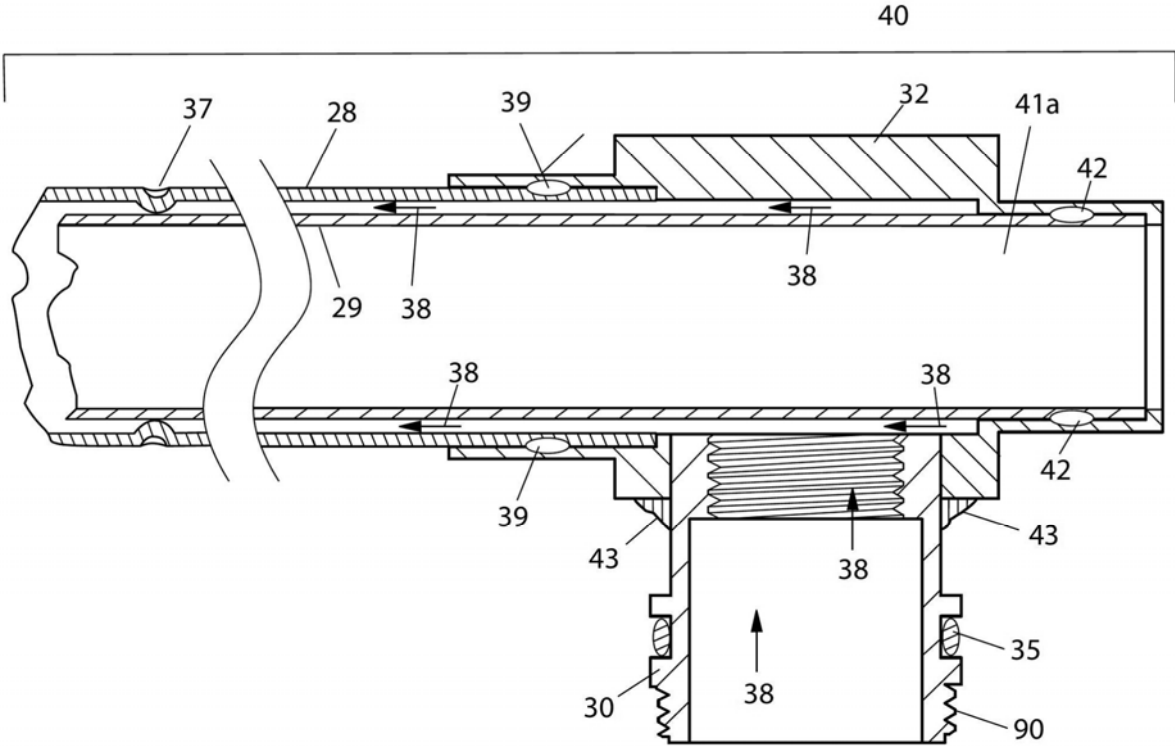


FIG. 11

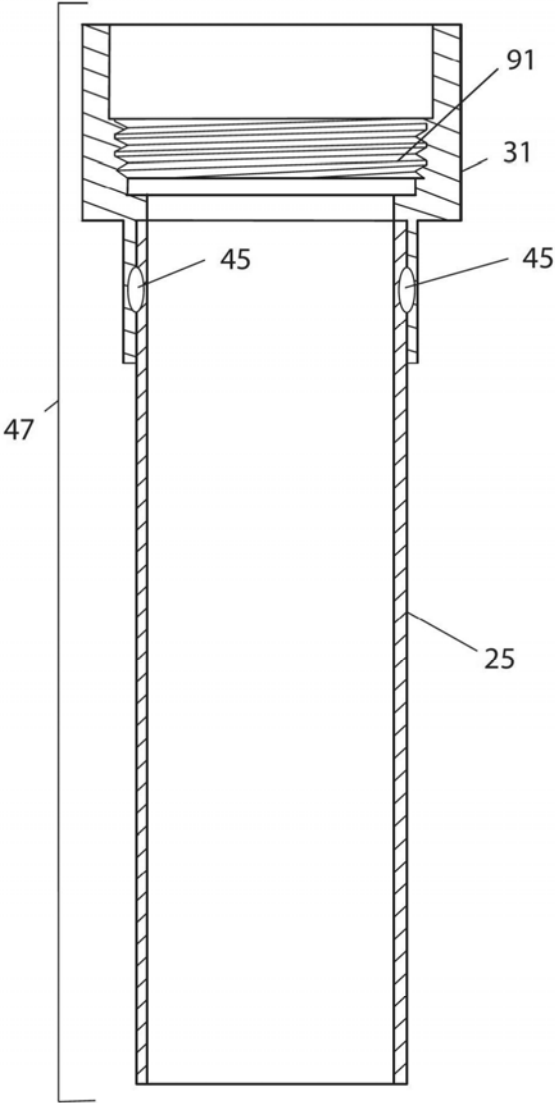


FIG. 12

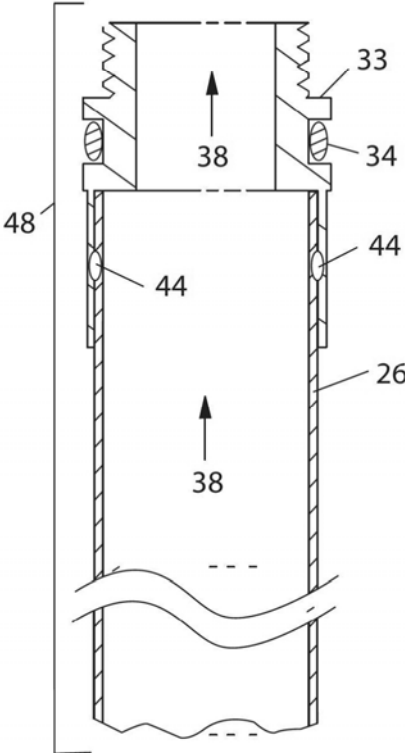


FIG. 13

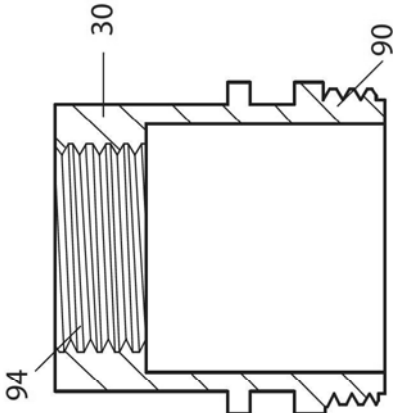


FIG. 16

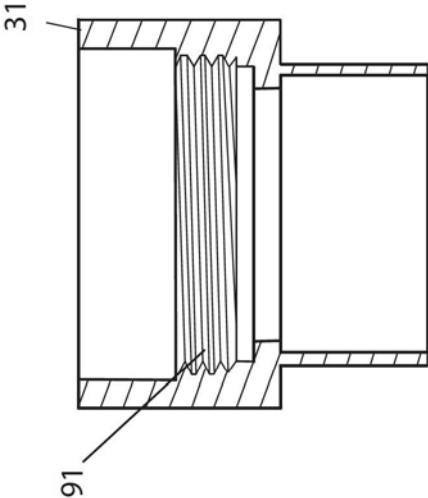


FIG. 15

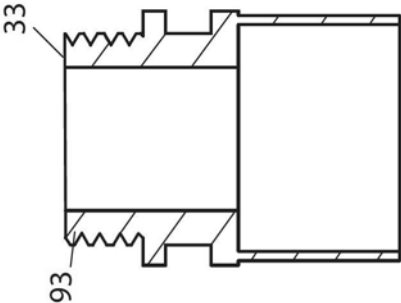


FIG. 14

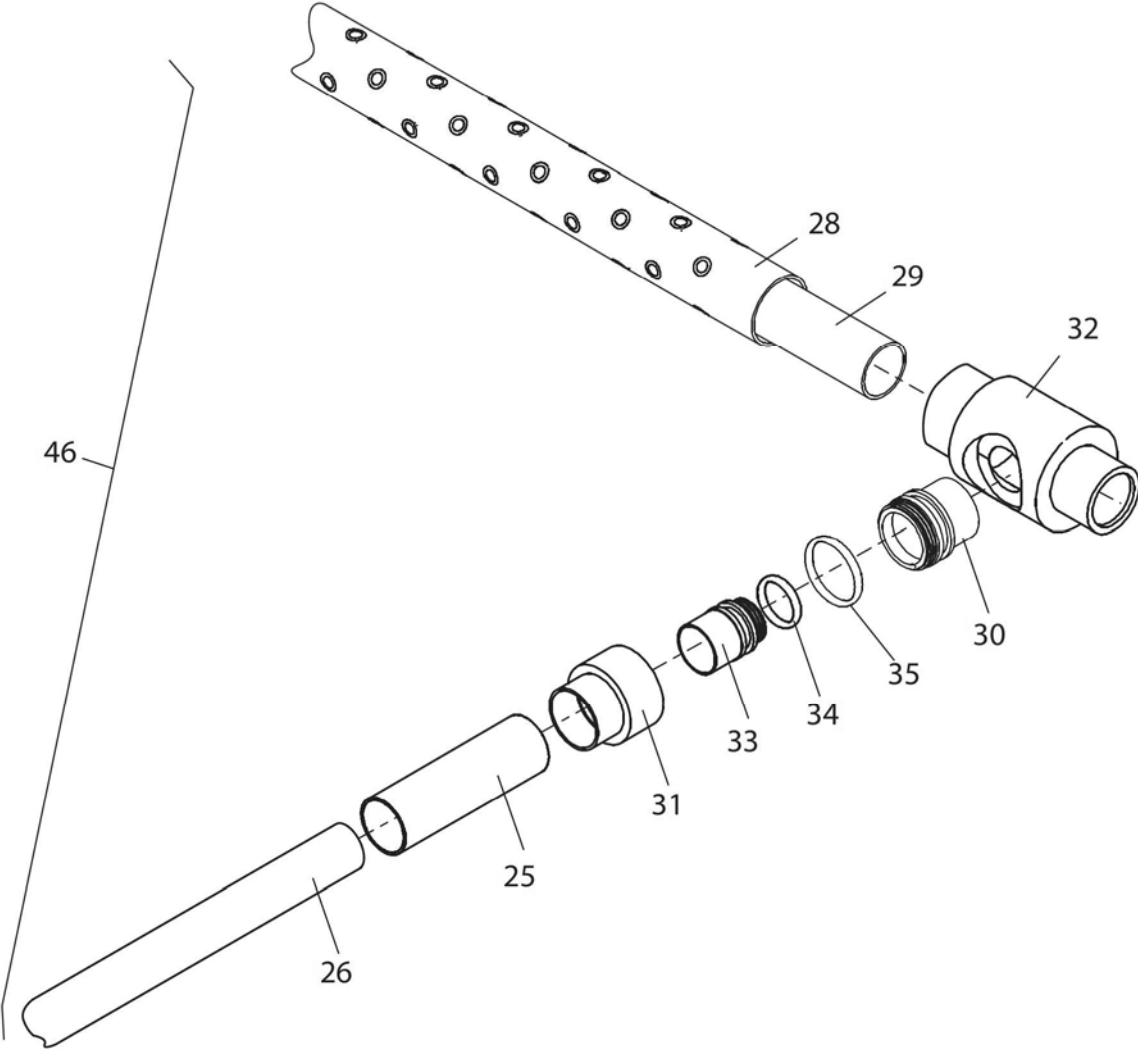


FIG. 17

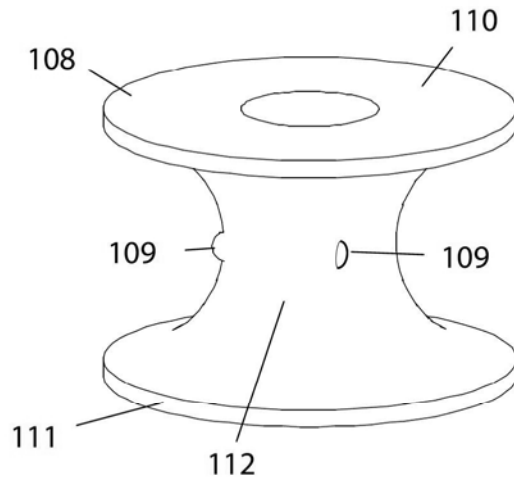


FIG. 18

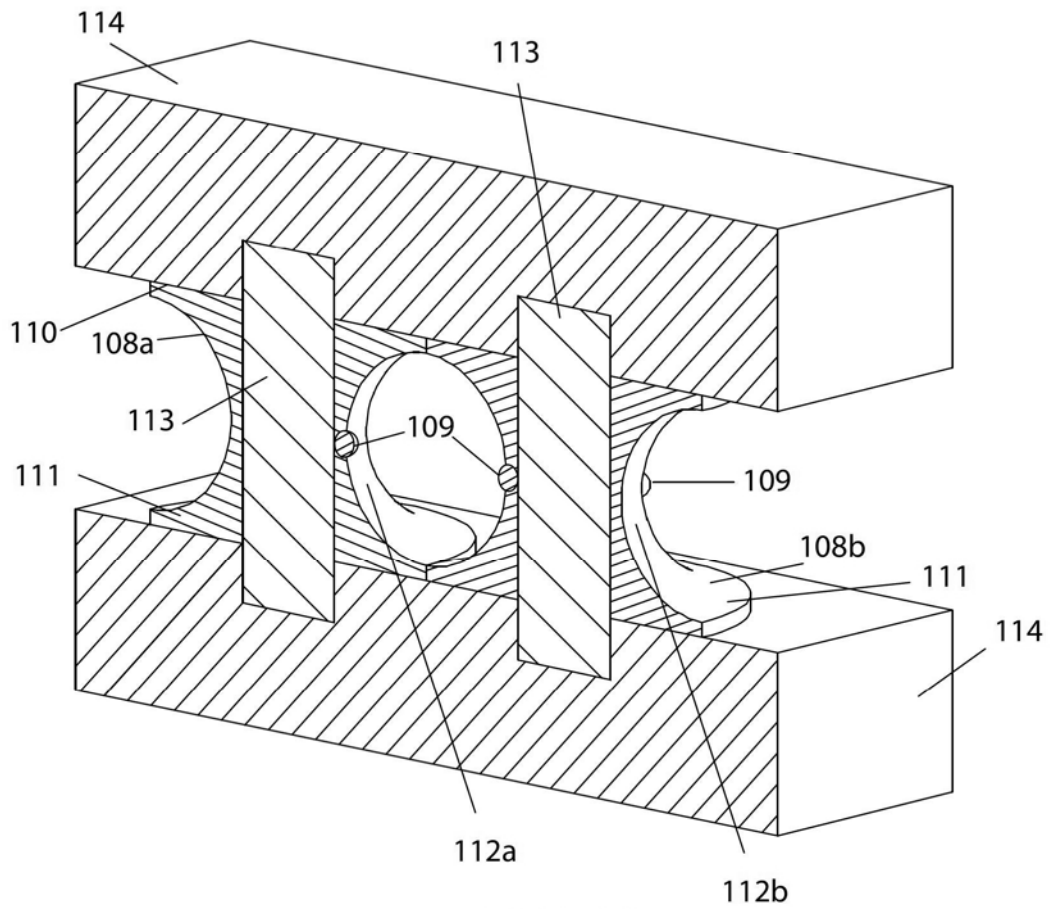


FIG. 19

1

**CONDENSING HEAT EXCHANGER FOR AIR
TO LIQUID HEAT PUMPS****CROSS REFERENCE TO RELATED
APPLICATIONS**

This application claims priority to U.S. Provisional Application Ser. No. 62/943,482, titled "Method and Condensing Heat Exchanger for Air to Liquid Heat Pumps" and filed on Dec. 4, 2019, the disclosure of which is hereby incorporated by reference in its entirety.

BACKGROUND OF THE INVENTION**Field of the Invention**

The present disclosure generally relates to a condensing heat exchanger for use in air source to liquid heat pumps, such as a swimming pool heat pump or liquid-to-liquid heat pumps and other applications.

Description of Related Art

Air source heat pumps have been used in various applications to remove heat from outdoor air and move it to another fluid or heat sink for space and water heating as well as in other applications, including process heat for industrial and commercial applications such as agricultural aquariums, fish ponds, etc. Heat pumps are increasingly replacing fossil fuel heaters, especially where they are already the most cost-effective heating method, where the cost per delivered Btu is greater than the cost of the electricity required to move a Btu of heat from the air using a heat pump. Swimming pool heat pumps, one such application, have been manufactured for over 50 years. In the past, due to their unfamiliarity and higher initial cost, they have been overlooked by many pool owners.

In the last few decades, however, swimming pool heat pumps have become increasingly popular as a more efficient and cost-effective alternative to fossil fuel pool heaters, such as natural gas, propane, and oil-fired units, due to their significant operating cost savings, which quickly offset the higher initial cost of swimming pool heat pumps. It is not uncommon for a swimming pool heat pump to have a payback period of one or two seasons. As a result, all major fossil fuel pool heater manufacturers now also make and sell heat pump models. However, due to the higher initial cost and recent drops in the prices of fossil fuels resulting from fracking, fossil fuel pool heaters still have the larger market share.

The higher cost of a swimming pool heat pump compared to a fossil fuel pool heater is due to the additional fan motor and air moving components, the refrigeration system piping, and the compressor. In addition, cost is increased by the need for two heat exchangers, namely, an evaporator for removing heat from the air to the cooler low-pressure evaporating refrigerant and a condenser for transferring that heat from the hotter compressed high-pressure refrigerant gas to the swimming pool or spa water. The first swimming pool heat pumps originally adopted two of the controls as well as the heat exchanger tube material used by the fossil fuel pool heater: (1) a water pressure switch to detect water flow by sensing the back pressure of the pump; (2) a mechanical thermostat to monitor water temperature; and (3) copper and cupronickel heat exchanger material that could function until the chlorinated water corrosion caused leaks, ruining the pump system.

2

Modern swimming pool heat pumps and many gas heaters now use an electronic controller and various tubing systems. Some current tubing can be 30-80 feet in length, with spiral tube in tube types having about the same equivalent length. Heat Siphon® uses a helical coil approximately 50 feet long in its 50,000 BTUH model and 75 feet long in larger models. It is therefore desired to arrange a heat exchange system that uses a significantly lesser amount of tubing while providing the same heat exchanging properties of modern swimming pool heat pumps.

SUMMARY OF THE INVENTION

In one embodiment or aspect of the present disclosure, a heat exchange device may include a first pipe including a first inlet, a first outlet, and a first sidewall extending therebetween; a second pipe including a second inlet, a second outlet, and a second sidewall extending therebetween; a third pipe including a third inlet, a third outlet, and a third sidewall extending therebetween; and a plurality of dimples extending between the first sidewall and the second sidewall. The second sidewall may surround and extend about the first sidewall, the third sidewall may surround the second sidewall, and the first sidewall may define a first fluid passage configured to permit flow of a first fluid; the second sidewall and the first sidewall may define a second fluid passage configured to permit flow of a second fluid; and the third sidewall and the second sidewall may define a third fluid passage configured to permit flow of the first fluid. The second fluid passage may be a micro flow passage. The plurality of dimples may extend from at least one of a radially inner surface of the second pipe or a radially outer surface of the first pipe. The plurality of dimples may extend from a radially inner surface of the second pipe. The plurality of dimples may contact the radially outer surface of the first pipe. At least four dimples may extend about a perimeter of the second sidewall. One of the at least four dimples may radially oppose another of the at least four dimples.

In another embodiment or aspect, the plurality of dimples may be arranged in rows about a perimeter of the second sidewall. The first sidewall and the second sidewall may be concentric. The first inlet may be perpendicular to the second inlet, and the first outlet may be perpendicular to the second outlet. A first fitting may be configured to align the first inlet relative to the second inlet, and a second fitting may be configured to align the first outlet relative to the second outlet. The second inlet may be connected to the first fitting by a first pressure relief tube, and the second outlet may be connected to the second fitting by a second pressure relief tube. The first pressure relief tube may extend about the second inlet defining a first pressure relief passage, and the second pressure relief tube may extend about the second outlet defining a second pressure relief passage.

In another embodiment or aspect, the first pressure relief tube may be connected to a first pressure tube weld fitting, and the second pressure relief tube may be connected to a second pressure tube weld fitting. The first pressure relief tube weld fitting may be threadingly engaged to a first water seal weld fitting, and the second pressure tube weld fitting may be threadingly engaged to a second water seal weld fitting; and the first water seal weld fitting may be connected to the first fitting, and the second water seal weld fitting may be connected to the second fitting. A first refrigerant weld fitting may be disposed between the first pressure tube weld fitting and the first water seal fitting, and a second refrigerant weld fitting may be disposed between the second pressure tube

3

weld fitting and the second water seal fitting. The first refrigerant weld fitting may be configured to accept the second inlet therein, and the second weld fitting may be configured to accept the second outlet therein. A first O-ring may be disposed between the first pressure relief weld fitting and the first refrigerant weld fitting. A second O-ring may be disposed between the second pressure relief weld fitting and the second refrigerant weld fitting. The first and second O-rings may be configured to prevent leakage of the first fluid. The first fitting may be connected to the first pipe by a first weld and connected to the second pipe by a second weld. The second fitting may be connected to the first pipe by a third weld and connected to the second pipe by a fourth weld.

In another embodiment or aspect of the present disclosure, a heat exchange system for a swimming pool heat pump may include a refrigerant flow path which may include an air moving device, an evaporating heat exchanger, a refrigerant compressor, at least one isolation fitting, a heat exchanger, and at least one metering expansion device, each in fluid communication. The heat exchanger may include a first pipe for permitting the flow of water from the swimming pool into the heat exchanger, the first pipe including a first inlet, a first outlet, and a first sidewall extending therebetween; a second pipe for permitting the flow of the refrigerant into the heat exchanger, the second pipe including a second inlet, a second outlet, and a second sidewall extending therebetween; a third pipe including a third inlet, a third outlet, and a third sidewall extending therebetween; and a plurality of dimples extending between the first sidewall and the second sidewall. The second sidewall may surround and extend about the first sidewall, and the third sidewall may surround and extend about the second sidewall. The first sidewall may define a first fluid passage configured to permit flow of a first fluid, the second sidewall and the first sidewall may define a second fluid passage configured to permit flow of a second fluid, and the third sidewall and the second sidewall may define a third fluid passage configured to permit flow of the first fluid. The second fluid passage may be a micro fluid passage. The plurality of dimples may extend radially inward from the second sidewall toward the first sidewall. The plurality of dimples may contact a radially outward surface of the first sidewall. A first pressure relief tube may extend about the second inlet, and a second pressure relief tube may extend about the second outlet. The first pressure relief tube and the second inlet may define a first passage, and the second pressure relief tube and the second outlet may define a second passage. The first passage and the second passage may be configured to release pressure from the heat exchange system to the atmosphere.

In some embodiments or aspects, the present disclosure may be characterized by one or more of the following numbered clauses:

Clause 1. A heat exchange device comprising: a first pipe comprising a first inlet, a first outlet, and a first sidewall extending therebetween; a second pipe comprising a second inlet, a second outlet, and a second sidewall extending therebetween; a third pipe comprising a third inlet, a third outlet, and a third sidewall extending therebetween; and a plurality of dimples extending between the first sidewall and the second sidewall, wherein the second sidewall surrounds and extends about the first sidewall, wherein the third sidewall surrounds and extends about the second sidewall, wherein the first sidewall defines a first fluid passage configured to permit flow of a first fluid, and the third sidewall and the second sidewall define a third fluid passage config-

4

ured to permit flow of the first fluid, the second sidewall and the first sidewall define a second fluid passage configured to permit flow of a second fluid, and wherein the second fluid passage is a micro flow passage.

Clause 2. The heat exchange device of clause 1, wherein the plurality of dimples extend radially from at least one of a radially inner surface of the second pipe or a radially outer surface of the first pipe.

Clause 3. The heat exchange device of clause 1 or 2, wherein the plurality of dimples extend from a radially inner surface of the second pipe.

Clause 4. The heat exchange device of any of clauses 1-3, wherein the plurality of dimples contact the radially outer surface of the first pipe.

Clause 5. The heat exchange device of any of clauses 1-4, wherein at least four dimples extend about a perimeter of the second sidewall.

Clause 6. The heat exchange device of any of clauses 1-5, wherein the at least four dimples are evenly spaced about the perimeter of the second sidewall.

Clause 7. The heat exchange device of any of clauses 1-6, wherein one of the at least four dimples radially opposes another of the at least four dimples.

Clause 8. The heat exchange device of any of clauses 1-7, wherein the plurality of dimples are arranged in rows about a perimeter of the second sidewall.

Clause 9. The heat exchange device of any of clauses 1-8, wherein the first sidewall and the second sidewall are concentric.

Clause 10. The heat exchange device of any of clauses 1-9, wherein the first inlet is perpendicular to the second inlet and the first outlet is perpendicular to the second outlet.

Clause 11. The heat exchange device of any of clauses 1-10, further comprising a first fitting configured to align the first inlet relative to the second inlet and a second fitting configured to align the first outlet relative to the second outlet.

Clause 12. The heat exchange device of any of clauses 1-11, wherein the second inlet is connected to the first fitting by a first pressure relief tube and the second outlet is connected to the second fitting by a second pressure relief tube, and wherein the first pressure relief tube extends about the second inlet defining a first pressure release passage and the second pressure relief tube extends about the second outlet defining a second pressure release passage.

Clause 13. The heat exchange device of any of clauses 1-12, wherein the first pressure relief tube is connected to a first pressure tube weld fitting, and the second pressure relief tube is connected to a second pressure tube weld fitting, wherein the first pressure tube weld fitting is threadingly engaged to a first water seal weld fitting and the second pressure tube weld fitting is threadingly engaged to a second water seal weld fitting, and wherein the first water seal weld fitting is connected to the first fitting and the second water seal weld fitting is connected to the second fitting.

Clause 14. The heat exchange device of any of clauses 1-13, wherein a first refrigerant weld fitting is disposed between the first pressure tube weld fitting and the first water seal fitting, and a second refrigerant weld fitting is disposed between the second pressure tube weld fitting and the second water seal fitting, and wherein the first refrigerant weld fitting is configured to accept the second inlet therein and the second refrigerant weld fitting is configured to accept the second outlet therein.

Clause 15. The heat exchange device of any of clauses 1-14, wherein a first O-ring is disposed between the first pressure relief weld fitting and the first refrigerant weld

5

fitting, and a second O-ring is disposed between the second pressure relief weld fitting and the second refrigerant weld fitting, and wherein the first and second O-rings are configured to prevent leakage of the first fluid.

Clause 16. The heat exchange device of any of clauses 1-15, wherein the first fitting is connected to the first pipe by a first weld and connected to the second pipe by a second weld, and wherein the second fitting is connected to the first pipe by a third weld and connected to the second pipe by a fourth weld.

Clause 17. A heat exchange system for a swimming pool heat pump, the heat exchange system comprising: a refrigerant flow path comprising: an air moving device; an evaporating heat exchanger; a refrigerant compressor; at least one isolation fitting; a heat exchanger; and at least one metering expansion device, wherein the air moving device, the evaporating heat exchanger, the refrigerant compressor, the at least one isolation fitting, the heat exchanger, and the at least one metering expansion device are in fluid communication, wherein the heat exchanger comprises: a first pipe for permitting the flow of water from the swimming pool into the heat exchanger, the first pipe comprising a first inlet, a first outlet, and a first sidewall extending therebetween; a second pipe for permitting the flow of the refrigerant into the heat exchanger, the second pipe comprising a second inlet, a second outlet, and a second sidewall extending therebetween; a third pipe comprising a third inlet, a third outlet, and a third sidewall extending therebetween; and a plurality of dimples extending between the first sidewall and the second sidewall, wherein the second sidewall surrounds and extends about the first sidewall, wherein the third sidewall surrounds and extends about the second sidewall, wherein the first sidewall defines a first fluid passage configured to permit flow of a first fluid, the second sidewall and the first sidewall define a second fluid passage configured to permit flow of a second fluid, and the third sidewall and the second sidewall define a third fluid passage configured to permit flow of the first fluid, and wherein the second fluid passage is a micro fluid passage.

Clause 18. The heat exchange system of clause 17, wherein the plurality of dimples extend radially inward from the second sidewall towards the first sidewall.

Clause 19. The heat exchange system of clause 17 or 18, wherein the plurality of dimples contact a radially outward surface of the first sidewall.

Clause 20. The heat exchange system of any of clauses 17-20, further comprising a first pressure relief tube extending about the second inlet and a second pressure relief tube extending about the second outlet, wherein the first pressure relief tube and the second inlet define a first passage, and the second pressure relief tube and the second outlet define a second passage, and wherein the first passage and the second passage are configured to release pressure from the heat exchange system to the atmosphere.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a system view of an air source heat pump with a heat exchanger according to one embodiment or aspect of the present disclosure;

FIG. 2 is a perspective view of a heat exchanger assembly according to one embodiment or aspect of the present disclosure;

FIG. 3 is a perspective view of a tube assembly of the heat exchanger assembly of FIG. 2;

FIG. 4 is a perspective view of the tubes of the tube assembly of FIG. 3;

6

FIG. 5 is a cross-sectional view of the tubes of FIG. 4 taken at line A-A;

FIG. 6 is a perspective view of the tubes of FIG. 4;

FIG. 7 is a side view of the heat exchanger assembly of FIG. 2 in a coiled configuration;

FIG. 8 is a cross-sectional view of a tee and fitting assembly of the heat exchanger assembly of FIG. 2;

FIG. 9 is a cross-sectional view of part of the fitting assembly of FIG. 8;

FIG. 10 is a partial perspective view of a fitting according to one embodiment or aspect of the present disclosure;

FIG. 11 is a cross-sectional view of a tee assembly according to one embodiment or aspect of the present disclosure;

FIG. 12 is a cross-sectional view of a pressure relief tube assembly according to one embodiment or aspect of the present disclosure;

FIG. 13 is a cross-sectional view of an inlet or outlet tube assembly according to one embodiment or aspect of the present disclosure;

FIG. 14 is a cross-sectional view of a refrigerant weld fitting according to one embodiment or aspect of the present disclosure;

FIG. 15 is a cross-sectional view of a pressure relief weld fitting according to one embodiment or aspect of the present disclosure;

FIG. 16 is a cross-sectional view of a water seal weld fitting according to one embodiment or aspect of the present disclosure;

FIG. 17 is an exploded view of a tube and tee assembly according to one embodiment or aspect of the present disclosure;

FIG. 18 is a dimple forming wheel according to one embodiment or aspect of the present disclosure; and

FIG. 19 is a cross-sectional view of a dimple forming block according to another embodiment or aspect of the present disclosure.

DESCRIPTION OF THE INVENTION

As used herein, the singular forms of “a”, “an”, and “the” include plural referents unless the context clearly dictates otherwise.

Spatial or directional terms, such as “left”, “right”, “inner”, “outer”, “above”, “below”, and the like, relate to the disclosure as shown in the drawing figures and are not to be considered as limiting, as the disclosure can assume various alternative orientations.

All numbers and ranges used in the specification and claims are to be understood as being modified in all instances by the term “about”. By “about” is meant plus or minus twenty-five percent of the stated value, such as plus or minus ten percent of the stated value. However, this should not be considered as limiting to any analysis of the values under the doctrine of equivalents.

Unless otherwise indicated, all ranges or ratios disclosed herein are to be understood to encompass the beginning and ending values and any and all subranges or subratios subsumed therein. For example, a stated range or ratio of “1 to 10” should be considered to include any and all subranges or subratios between (and inclusive of) the minimum value of 1 and the maximum value of 10; that is, all subranges or subratios beginning with a minimum value of 1 or more and ending with a maximum value of 10 or less. The ranges and/or ratios disclosed herein represent the average values over the specified range and/or ratio.

The terms “first”, “second”, and the like are not intended to refer to any particular order or chronology, but refer to different conditions, properties, or elements.

The term “at least” is synonymous with “greater than or equal to”.

The term “not greater than” is synonymous with “less than or equal to”.

As used herein, “at least one of” is synonymous with “one or more of”. For example, the phrase “at least one of A, B, and C” means any one of A, B, or C, or any combination of any two or more of A, B, or C. For example, “at least one of A, B, and C” includes one or more of A alone; or one or more B alone; or one or more of C alone; or one or more of A and one or more of B; or one or more of A and one or more of C; or one or more of B and one or more of C; or one or more of all of A, B, and C.

The term “includes” is synonymous with “comprises”.

As used herein, the terms “parallel” or “substantially parallel” mean a relative angle as between two objects (if extended to theoretical intersection), such as elongated objects and including reference lines, that is from 0° to 5°, or from 0° to 3°, or from 0° to 2°, or from 0° to 1°, or from 0° to 0.5°, or from 0° to 0.25°, or from 0° to 0.1°, inclusive of the recited values.

As used herein, the terms “perpendicular” or “substantially perpendicular” mean a relative angle as between two objects at their real or theoretical intersection that is from 85° to 90°, or from 87° to 90°, or from 88° to 90°, or from 89° to 90°, or from 89.5° to 90°, or from 89.75° to 90°, or from 89.9° to 90°, inclusive of the recited values.

The terms “water” and “heated fluid” are interchangeable throughout this disclosure. Both terms may be used to describe the fluid that receives heat within a heat exchanging system. Water may be used in conjunction with swimming pool heat pump applications, while heated fluid may be used to describe other applications. The terms “refrigerant”, “coolant”, and “heating fluid” are also interchangeable throughout this disclosure. Each term may be used to describe the fluid that provides heat to the water or heated fluid within a heat exchanging system.

The present disclosure is directed to a heat exchanging device **200** that can be used in swimming pool heat pumps or other heat exchanging applications. With reference to FIG. **1**, an exemplary heat exchanging system **100** using the heat exchanging device **200** is shown. As shown, the heat exchanging system **100** generally operates in the clockwise direction to heat water with a refrigerant or heating fluid. The heat exchanging system **100** includes an air moving device **101** and an evaporating heat exchanger **102** that function to extract heat from the air and supply it to the refrigerant. The heat exchanging system also includes a refrigerant compressor **103** that compresses and further heats the refrigerant before being sent to the heat exchanging device **200**. The heat exchanging device **200** can be a condensing heat exchanger **104** that includes a fluid flow path for water and a fluid flow path (not shown) for the refrigerant. This means that the refrigerant is initially a gas, but as it flows through the heat exchanging device **200** and transfers heat to the water, some of the refrigerant may condense from a gas to a liquid. The fluid flow path for the water includes an inlet **105** that may receive water from a pool or another source and an outlet **106** that sends heated water back to the pool or initial water source. After the refrigerant provides heat to the water, it then flows to a metering expansion device **107** that creates a high-pressure zone for condensing the hot compressed refrigerant gas and a low-pressure side to evaporate the cool liquid refrigerant.

From there, the refrigerant is recycled and passes through the air moving device and evaporating heat exchanger **102**, repeating the heat exchanging process.

To facilitate electrical isolation of the heat exchanger **200** from the rest of the heat pump system **100** and to allow easier repair and replacement of the heat exchanger **200** and other elements shown in FIG. **1**, the flow path of the refrigerant includes two isolation fittings **54**. Examples of isolation fittings **54** are described in U.S. Pat. No. 9,255,656, the disclosure of which is hereby incorporated by reference in its entirety. The isolation fittings **54** allow for the heat exchanger **200** to be separated and electrically isolated from the system **100** to eliminate galvanic corrosion and so that either the heat exchanger **200** or other elements of the system **100** can be repaired, replaced, or otherwise modified.

With reference to FIGS. **2-7**, the heat exchanger **200** and the elements thereof are shown. The heat exchanger **200** includes a first pipe **29**, a second pipe **28**, and a third pipe **20**. The first pipe **29** is within the second pipe **28**, and both are within the third pipe **20**. In some embodiments, the first pipe **29**, the second pipe **28**, and the third pipe **20** are concentric. The pipes **20**, **28**, **29** interact to define three different flow paths that are shown in FIGS. **5** and **8**. A first flow path **41a** is defined entirely by the first pipe **20**, a second flow path **38** is defined between the first pipe **20** and the second pipe **28**, and a third flow path **41b** is defined between the second pipe **28** and the third pipe **29**. Each flow path receives a fluid, such as the water and refrigerant, therethrough to facilitate the heat transfer from the refrigerant to the water, thereby increasing the temperature of the water as it returns back to the pool or its initial source. As configured, the water and the refrigerant flow in the same direction; however, as will become clear based on the disclosure below, the two fluids may also flow in opposing directions.

In one embodiment or aspect of the present disclosure, water flows through the first flow path **41a** and the third flow path **41b**, while the refrigerant flows through the second flow path **38**. In this embodiment, the water flows around the refrigerant by flowing through the first pipe **29** and between the second pipe **28** and the third pipe **20**. Heat may flow in both radial directions from the refrigerant in the second flow path **38** through the first pipe **29** and the second pipe **28** in order to heat the water. Because the water surrounds the second flow path **38** in both radial directions, increased heat exchange may occur. The flow path described herein can also be seen in FIGS. **8** and **9**. In this embodiment, the water enters the heat exchanger **200** from the pool by way of an inlet **18** through pool piping **21**. The water leaves the heat exchanger via an outlet **19** that also may be made of the same pool piping **21**. The refrigerant enters the heat exchanger by way of inlet **26** and leaves by way of outlet **27**. The details of the inlets **18**, **26** and outlets **19**, **27** of the heat exchanger **200** and the relationship between each will be described in more detail below. It is contemplated that other fluid flow configurations between the refrigerant and the water and any of the three flow paths, **41a**, **38**, **41b** may be used with the heat exchange device **200** described herein.

To facilitate this heat transfer, the first pipe **29** and the second pipe **28** may be made of titanium, while the third pipe **20** may be made of PVC pipe, such as schedule **40** PVC pipe or other pipe known to those having skill in the art for transporting water or another heated fluid.

To further help facilitate the heat transfer from the second flow path **38** to the first and third flow paths **41a**, **41b**, a plurality of dimples **37** may be placed between the first pipe **29** and the second pipe **28**, within the second flow path **38**. As shown in FIGS. **3-6**, the second pipe **28** includes the

dimples 37. For clarity, not all dimples 37 are labeled. The dimples 37 extend radially inward toward the first pipe 29. The dimples 37 may contact an outer surface of the first pipe 29, as shown in FIG. 5, or they may only extend partially toward the first pipe 29. The dimples 37 disrupt any laminar flow within the second flow path 38 and can generally create turbulence within the flow of the refrigerant. These features further enhance the heat transfer between the refrigerant, through the first and second pipes 29, 28, to the water, in the first and third flow paths 41a, 41b. While the dimples are shown extending from the second pipe 28 toward the first pipe 29, it is contemplated that the dimples may extend from the first pipe 29 toward the second pipe 28, still creating turbulence between the titanium first and second pipes 28, 29. The dimples 37 may also be formed in both the first pipe 29 and the second pipe 28, either contacting each other within the second flow path 38 or being provided at different locations along the second flow path 38. It is further contemplated that an element (not shown) may extend between the first pipe 29 and the second pipe 28 in order to provide the dimples 37 in either radial direction within the second flow path 38.

Specific arrangements of the dimples 37 will now be described. The dimples 37 can be arranged in rows across the surface of the second pipe 28. Each row of dimples 37 extends around the second pipe 28 in a circle. As shown, each row consists of four dimples 37 arranged in a plus-shape. In other words, two dimples 37 out of the four in the row are located at opposing points across the second pipe 28. If the second pipe 28 were the face of a clock, the dimples would be located at the 12, 3, 6, and 9 positions. Four exemplary dimples 37a, 37b, 37c, 37d are identified in FIG. 5. It is contemplated that each row of dimples 37 may have more dimples 37 than the four shown and described above. For example, a row of dimples 37 may include six or eight dimples with pairs of dimples opposing each other in the manner described above. If an odd number of dimples 37 is desired, they may be spaced equidistant from each other about the second pipe 28 in each row.

Each row of dimples 37 may also be rotated relative to the previous row. Depending on the desired fluid flow properties within the second flow path 38, the rows of dimples 37 can be rotated anywhere from 1°-89° relative to the previous row. As shown in FIGS. 3, 4, and 6, the rows are rotated 45° relative to the previous row. In other embodiments, the rows may be rotated 15°, 30°, or 60°.

In embodiments where the dimples 37 contact the first pipe 29, the alignment of dimples 37 serves to hold the first pipe 29 within the second pipe 28 within the heat exchanger 200. In this configuration, the distance between the first pipe 29 and the second pipe 28 must be small enough to permit the dimples 37 to contact the first pipe 29. The close alignment between the first pipe 29 and the second pipe 38 creates a micro channel gap or a micro flow passage, having a width extending approximately 0.020 inches to 0.050 inches between an outer surface of the first pipe 29 to an inner surface of the second pipe 28. In some embodiments, the micro channel gap may extend approximately 0.035 inches between the first and second pipes 29, 28. The small second flow path 38 results in the refrigerant condensing quickly within the second flow path 38 because of the water flowing radially about the second flow path 38 on both sides. To further facilitate the heat exchange between the refrigerant and the water in the current embodiment, the outside diameter of the first pipe 29 may be one-half inch while the inside diameter of the second pipe 28 may be five-eighths of an inch. The thickness of the second pipe 28 may also be

0.028 inches, leading to rapid micro channel condensing of the refrigerant as it transfers heat to the water through the second pipe 28 and the first pipe 29. In some instances, up to 25 feet of titanium tubing can be saved by using the heat exchanger 200 described herein as opposed to those that are currently known in the art and commercially used. In other instances, a reduction from 34 feet of single wall helical coil titanium tubing to two 6-foot pieces of concentrically arranged titanium tubing can be obtained.

As shown in FIGS. 6 and 7, the pipes 20, 28, 29 are capable of being curved, twisted, or coiled to allow a length of piping to be utilized within the heat exchanging system 100 that creates enough surface area for proper heat exchange to occur between the refrigerant and the water. It is contemplated that any number of coils or helical twists may be provided within the piping depending on the amount of desired heat exchange. For example, a single coil heat exchanger 200 is shown in FIG. 7. However, as mentioned above, the efficient nature of the heat exchanger 200 leads to fewer coils being required.

With reference to FIGS. 2, 3, and 7-17, the additional elements of the heat exchanger 200 will now be described. As mentioned above, the refrigerant enters the heat exchanger 200 by way of an inlet 26 and exits by way of an outlet 27, and water enters the heat exchanger 200 by way of an inlet 18 and exits by way of an outlet 19. As shown, in FIG. 8, after passing through the inlet 18, the water diverges between the first flow path 41a and the third flow path 41b, flowing around second pipe 28 and surrounding the refrigerant in the second flow path 38. Due to the nature of the heat exchange system 100 and because the water and the refrigerant flow in the same direction, fittings 32 and tees 22 must be used to configure the inlet 26 and the outlet 27 of the refrigerant relative to the inlet 18 and the outlet 19 of the water. As shown, two fittings 32 and two tees 22 are used to secure the refrigerant inlet 26 and outlet 27 to the heat exchange device 200, but each fitting 32 and tee 22 is identical, so only one will be shown and described. As shown in FIGS. 2 and 7, the refrigerant inlet 26 and outlet 27 are perpendicular with the water inlet 18 and outlet 19, with the refrigerant inlet 26 and outlet 27 capable of being bent or turned, as is shown in FIG. 7. However, it is contemplated that one of ordinary skill in the art can manipulate the fittings 32 and tees 22 to position the refrigerant inlet 26 and outlet 27 in an angled manner relative to the inlet 18 and outlet 19 of the water.

As shown in FIGS. 2, 3, 8, and 11, the fittings 32 serve to fluidly connect the refrigerant inlet 26 and outlet 27 to the second flow path 38 between the first pipe 29 and the second pipe 28, while the tees 22 serve to connect the third pipe 20 around the first pipe 29 and the second pipe 28. The fittings 32 are connected to the first pipe 29 by orbital weld 42 and to the second pipe 28 by orbital weld 39. The first pipe 29 and the second pipe 28, together with the fitting 32, form a welded annulus tee assembly 40 as shown in FIG. 11. FIG. 10 is an exemplary cross-sectional view of a fitting 32 having a first inner surface 50 that is welded to the first pipe 29 and a second inner surface 51 that is welded to the second pipe 28. The opening 55 allows refrigerant to enter the fitting 32 from the inlet 26 between the first pipe 29 and the second pipe 28, allowing the refrigerant to flow through the second flow path 38 while being sealed off from the first flow path 41a. Some of the refrigerant may contact an annulus 49 in order to fill the entirety of the second flow path 38.

A pressure relief tube 25 extends about an outer surface of the inlet 26. The pressure relief tube 25 ultimately provides a seal for the heat exchanger 200 which prevents the heated

11

fluid inside the heat exchanger **200** from leaking. The pressure relief tube **25** is joined to a pressure relief tube weld fitting **31** by an orbital weld bead **45**. The orbital weld bead **45** joins an outer surface of the pressure relief tube **25** to a receiving surface of the pressure relief tube weld fitting **31**. The receiving surface may operate like a flange and receive the pressure relief tube **25** therein. As shown in FIG. **12**, the pressure relief tube **25** and the pressure relief tube weld fitting **31** form a pressure relief tube fitting assembly **47**.

An inner surface **91** of the pressure tube weld fitting **31** is threadingly engaged with an outer surface **90** of a water seal weld fitting **30** that is connected to the fitting **32** by a weld **43**. As shown in FIG. **10**, surface **52** in the fitting **32** provides a stop so the water seal weld fitting **30** does not extend into the annulus between the first pipe **29** and the orbital fitting **32**, so as to eliminate flow blockage. A refrigerant weld fitting **33** is placed between the pressure relief tube weld fitting **31** and the water seal weld fitting **30**. The refrigerant weld fitting **33** has an engagement surface **93** that is threadingly engaged with an inner surface **94** of the water seal weld fitting **30**. The inlet **26** is connected to the refrigerant weld fitting **33** by an orbital weld **44**. Like the connection between the pressure relief tube **25** and the pressure relief tube weld fitting **31**, the connection between the inlet **26** and the refrigerant weld fitting **33** may occur along a receiving surface of the refrigerant weld fitting **33**, with the receiving surface accepting part of the inlet **26** in order to be welded together. As shown in FIG. **13**, the refrigerant weld fitting **33** and the inlet **26** form a fitting assembly **48**.

Due to the connections of the refrigerant weld fitting **33** and the relief tube weld fitting **31** with the water seal weld fitting **30**, the inlet **26** and the pressure relief tube **25** define a passage **53** that provides pressure relief to the atmosphere from the heat exchanger **200**. The relative sizes and relationships between these elements can be seen in FIGS. **8-17**.

O-rings **34**, **35**, **36** are also used to provide seals throughout the inner titanium tube assembly **46** and the heat exchanger **200**. O-ring **35** is provided between the pressure relief weld fitting **31** and the refrigerant weld fitting **33** to seal both elements off from the heated fluid. O-ring **34** provides an additional seal to prevent any heated fluid that may have leaked past O-ring **35** from entering the refrigerant system. This leaves the passage **53** open for any leak to escape to the atmosphere. This helps to release pressure caused by a leak in the heat exchanger **200**. O-ring **36** is placed within the tee **22** and its associated nut **24** and bushing **23**, which will now be described.

With reference to FIGS. **2** and **8**, the tee **22** includes a port **17** for accepting at least part of pressure relief tube fitting assembly **47** and the fitting assembly **48**. The tee **22** also includes a body **16** that is glued, welded, or otherwise connected to the third pipe **20** to define the third flow path **41b** in the heat exchanger **200**. A bushing **23** is glued into the port **17** with a nut **24** placed over top of the bushing **23** to screw into the bushing **23** and into the port **17**. The O-ring **36** is placed between the bushing **23** and the nut **24** to seal the port **17** to prevent any water or heated fluid from leaking out by squeezing against the pressure relief tube **25**. The pressure release permitted by passage **53** creates an effect so that, should a leak occur, air will enter the refrigerant flow path instead of water. This avoids potential water damage to the compressor **103**. The tee **22** can take a variety of sizes depending on the sizes of the heat exchanging tube assembly **46**. However, it is contemplated that the tee **22** is a 1.0" · 1.5" · 1.5" PVC schedule **40** tee **22**.

The process of assembling a heat exchanger will now be described. First, the pressure relief tube **25** is welded to

12

pressure relief weld fitting **31** to form the pressure relief tube fitting assembly **47**, the inlet **26** is welded to the refrigerant weld fitting **33** to form the fitting assembly **48**, and the water seal fitting **30** is welded to the fitting **32** to form the welded annulus tee assembly **40**. The welded annulus tee assembly **40** is inserted into a tee **22**. Then, the fitting assembly **48** is threaded into the water seal fitting **30** through the port **17** of the tee **22**, with O-ring **34** provided between the refrigerant weld fitting **33** and the water seal fitting **30**. Then, the welded pressure relief fitting **47** is threaded onto the titanium water seal fitting **30** with O-ring **35** provided between the water seal fitting **30** and the pressure relief weld fitting **31**. Finally, the bushing **23**, O-ring **36**, and nut **24** are fitted into the port **17**. The same process is repeated for the tee **22** and fitting **32** associated with the outlet **27**.

In accordance with another embodiment or aspect of the present disclosure and with reference to FIGS. **18** and **19**, two versions of a device **108** for making dimples **37** on the second pipe **29** are shown. In FIG. **18**, the device **108** includes two opposing heads **110**, **111** and a column **112** extending symmetrically therebetween. The column **112** includes one or more spherical projections **109** that create the dimples **37**. As shown, the column **112** includes three spherical projections, located 120° apart. It is contemplated that a different number of spherical projections **109** can be used on the column **112**. The column **112** is formed between the heads **110**, **111** so as to fit around the outer diameter of the second pipe **28**. The device **108** can then roll along the second pipe **29** and create the dimples **37** thereon. The device **108** of FIG. **19** is similar except that two wheels **108a**, **108b** are placed on two shafts **113** corresponding to two columns **112a**, **112b**. The wheels **108a**, **108b** include spherical projections **109** to create dimples **37** in the second pipe **28** by pulling the second pipe **28** between the columns **112a**, **112b** or along the columns **112a**, **112b** with the assistance of bearings or other mechanisms known to those having skill in the art.

While specific embodiments of the device of the present disclosure have been described in detail, it will be appreciated by those skilled in the art that various modifications and alternatives to those details could be developed in light of the overall teachings of the disclosure. Accordingly, the particular arrangements disclosed are meant to be illustrative only and not limiting as to the scope of the device of the present disclosure, which is to be given the full breadth of the claims appended and any and all equivalents thereof.

The invention claimed is:

1. A heat exchange device comprising:

- a first pipe comprising a first inlet, a first outlet, and a first sidewall extending therebetween;
- a second pipe comprising a second inlet, a second outlet, and a second sidewall extending therebetween;
- a third pipe comprising a third inlet, a third outlet, and a third sidewall extending therebetween;
- a first fitting configured to arrange the first inlet relative to the second inlet;
- a second fitting configured to arrange the first outlet relative to the second outlet;
- a first water seal weld fitting connected to the first fitting;
- a second water seal weld fitting connected to the second fitting;
- a first pressure relief tube connecting the second inlet to the first fitting;
- a second pressure relief tube connecting the second outlet to the second fitting; and
- a plurality of dimples extending between the first sidewall and the second sidewall,

13

wherein the second sidewall surrounds and extends about the first sidewall,

wherein the third sidewall surrounds and extends about the second sidewall,

wherein the first sidewall defines a first fluid passage configured to permit flow of a first fluid, the second sidewall and the first sidewall define a second fluid passage configured to permit flow of a second fluid, and the third sidewall and the second sidewall define a third fluid passage configured to permit flow of the first fluid, and

wherein the second fluid passage is a micro flow passage.

2. The heat exchange device of claim 1, wherein the plurality of dimples extend radially from at least one of a radially inner surface of the second pipe or a radially outer surface of the first pipe.

3. The heat exchange device of claim 2, wherein the plurality of dimples extend from a radially inner surface of the second pipe.

4. The heat exchange device of claim 3, wherein the plurality of dimples contact the radially outer surface of the first pipe.

5. The heat exchange device of claim 1, wherein the plurality of dimples comprise at least four dimples extending about a perimeter of the second sidewall.

6. The heat exchange device of claim 5, wherein the at least four dimples are evenly spaced about the perimeter of the second sidewall.

7. The heat exchange device of claim 6, wherein one of the at least four dimples radially opposes another of the at least four dimples.

8. The heat exchange device of claim 1, wherein the plurality of dimples are arranged in rows about a perimeter of the second sidewall.

9. The heat exchange device of claim 1, wherein the first sidewall and the second sidewall are concentric.

10. The heat exchange device of claim 1, wherein the first inlet is perpendicular to the second inlet and the first outlet is perpendicular to the second outlet.

11. The heat exchange device of claim 1, wherein the first pressure relief tube extends about the second inlet defining a first pressure release passage, and the second pressure relief tube extends about the second outlet defining a second pressure release passage.

12. The heat exchange device of claim 11, wherein the first pressure relief tube is connected to a first pressure tube weld fitting, and the second pressure relief tube is connected to a second pressure tube weld fitting,

wherein first pressure tube weld fitting is threadingly engaged to the first water seal weld fitting and the second pressure tube weld fitting is threadingly engaged to the second water seal weld fitting.

13. The heat exchange device of claim 12, wherein a first refrigerant weld fitting is disposed between the first pressure tube weld fitting and the first water seal fitting, and a second refrigerant weld fitting is disposed between the second pressure tube weld fitting and the second water seal fitting, and

wherein the first refrigerant weld fitting is configured to accept the second inlet therein and the second refrigerant weld fitting is configured to accept the second outlet therein.

14. The heat exchange device of claim 13, wherein a first O-ring is disposed between the first pressure relief weld fitting and the first refrigerant weld fitting, and a second O-ring is disposed between the second pressure relief weld fitting and the second refrigerant weld fitting, and

14

wherein the first and second O-rings are configured to prevent leakage of the first fluid.

15. The heat exchange device of claim 11, wherein the first fitting is connected to the first pipe by a first weld and connected to the second pipe by a second weld, and

wherein the second fitting is connected to the first pipe by a third weld and connected to the second pipe by a fourth weld.

16. A heat exchange system for a swimming pool heat pump, the heat exchange system comprising:

a refrigerant flow path comprising:

an air moving device;

an evaporating heat exchanger;

a refrigerant compressor;

at least one isolation fitting;

a heat exchanger; and

at least one metering expansion device;

wherein the air moving device, the evaporating heat exchanger, the refrigerant compressor, the at least one isolation fitting, the heat exchanger, and the at least one metering expansion device are in thermal communication,

wherein the heat exchanger comprises:

a first pipe for permitting the flow of water from the swimming pool into the heat exchanger, the first pipe comprising a first inlet, a first outlet, and a first sidewall extending therebetween;

a second pipe for permitting the flow of the refrigerant into the heat exchanger, the second pipe comprising a second inlet, a second outlet, and a second sidewall extending therebetween;

a third pipe comprising a third inlet, a third outlet, and a third sidewall extending therebetween

a first fitting configured to arrange the first inlet relative to the second inlet;

a second fitting configured to arrange the first outlet relative to the second outlet;

a first water seal weld fitting connected to the first fitting;

a second water seal weld fitting connected to the second fitting;

a first pressure relief tube connecting the second inlet to the first fitting;

a second pressure relief tube connecting the second outlet to the second fitting; and

a plurality of dimples extending between the first sidewall and the second sidewall,

wherein the second sidewall surrounds and extends about the first sidewall,

wherein the third sidewall surrounds and extends about the second sidewall,

wherein the first sidewall defines a first fluid passage configured to permit flow of a first fluid, the second sidewall and the first sidewall define a second fluid passage configured to permit flow of a second fluid, and the third sidewall and the second sidewall define a third fluid passage configured to permit flow of the first fluid, and

wherein the second fluid passage is a micro fluid passage.

17. The heat exchange system of claim 16, wherein the plurality of dimples extend radially inward from the second sidewall toward the first sidewall.

18. The heat exchange system of claim 17, wherein the plurality of dimples contact a radially outward surface of the first sidewall.

19. The heat exchange system of claim **16**,
wherein the first pressure relief tube and the second inlet
define a first passage, and the second pressure relief
tube and the second outlet define a second passage, and
wherein the first passage and the second passage are 5
configured to release pressure from the heat exchange
system to the atmosphere.

* * * * *